

Heylen Bricks, traditional bricks

A new brand for Wienerberger


**HEYLEN
BRICKS**




Wienerberger

Over 100 years experience



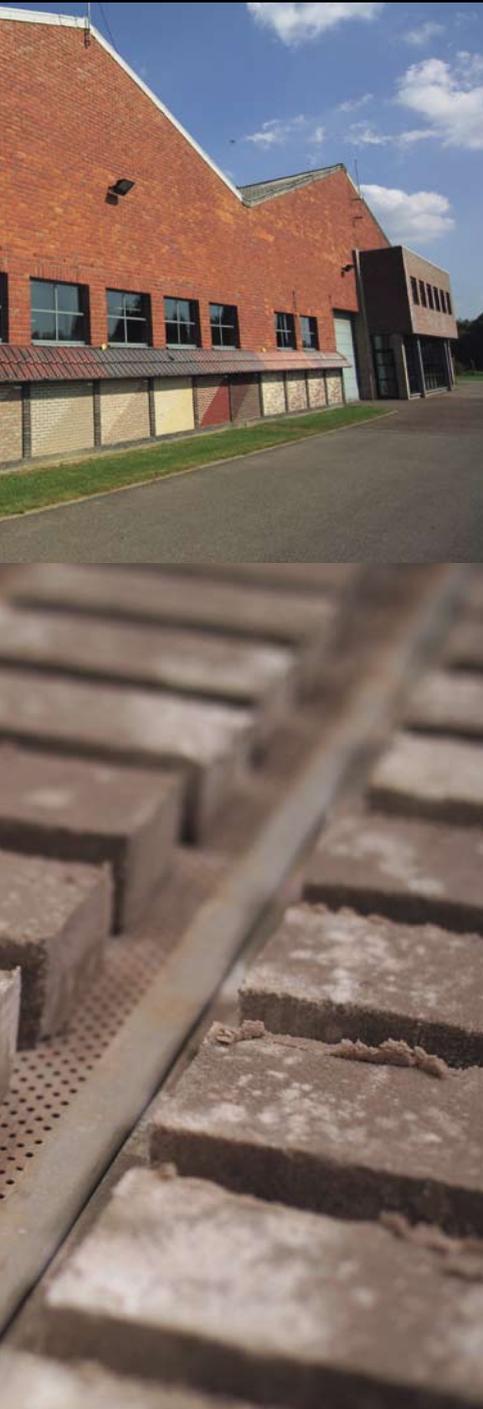

For more than a century Heylen has been manufacturing architectural bricks. Heylen has a long family tradition which has enabled the knowledge of making handcrafted bricks to be passed on through 3 generations. The unique colours are assured by the care dedicated to the details, the choice of clay used and the mastery of firing.

The integration of Heylen bricks does not only increase the Wienerberger portfolio but it is also an opportunity to offer an extended range of traditional multicoloured, monochrome or rustic bricks.

Synonymous with sustainability and durability, Heylen bricks stimulates your imagination and offers the choice of mixing colours and formats so that everyone can create their own style.

The Heylen range can be used for all projects, from the construction of traditional houses to modern architectural buildings.

Classics



Alyssum



Veldbloem



Barok "83"



Duinbergen



Hocht



Barok "83"

Classics



Rood



Maldon Antique




Neo Romaans




Oud Romaans



Rood

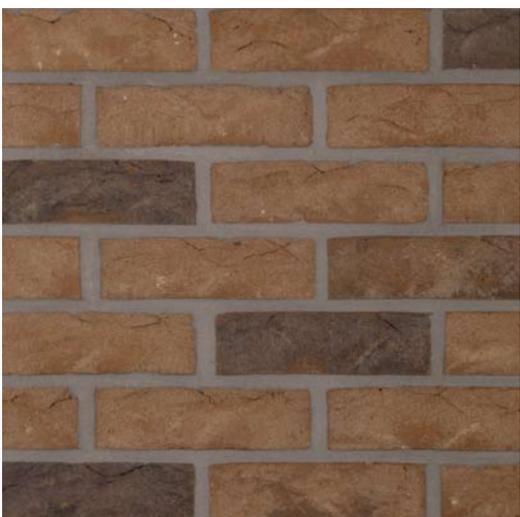


Welham Antique

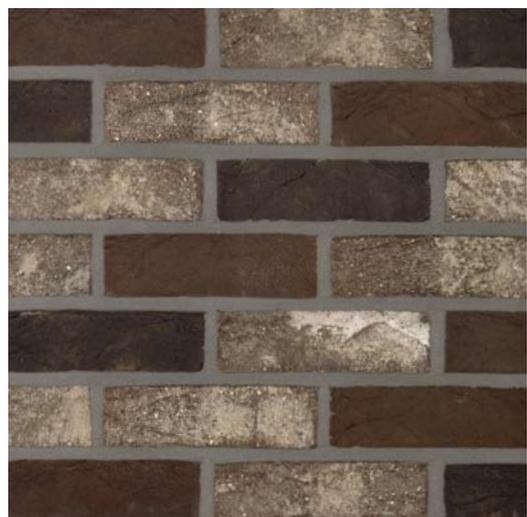

Cie Classic
Only on order

Rainbow

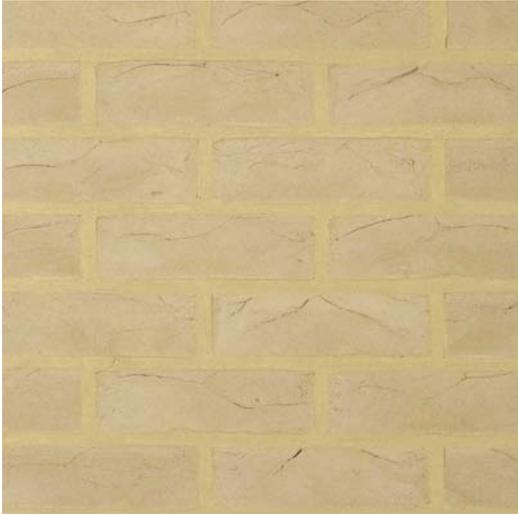

Amarillo




Bianco




Lavagrijs



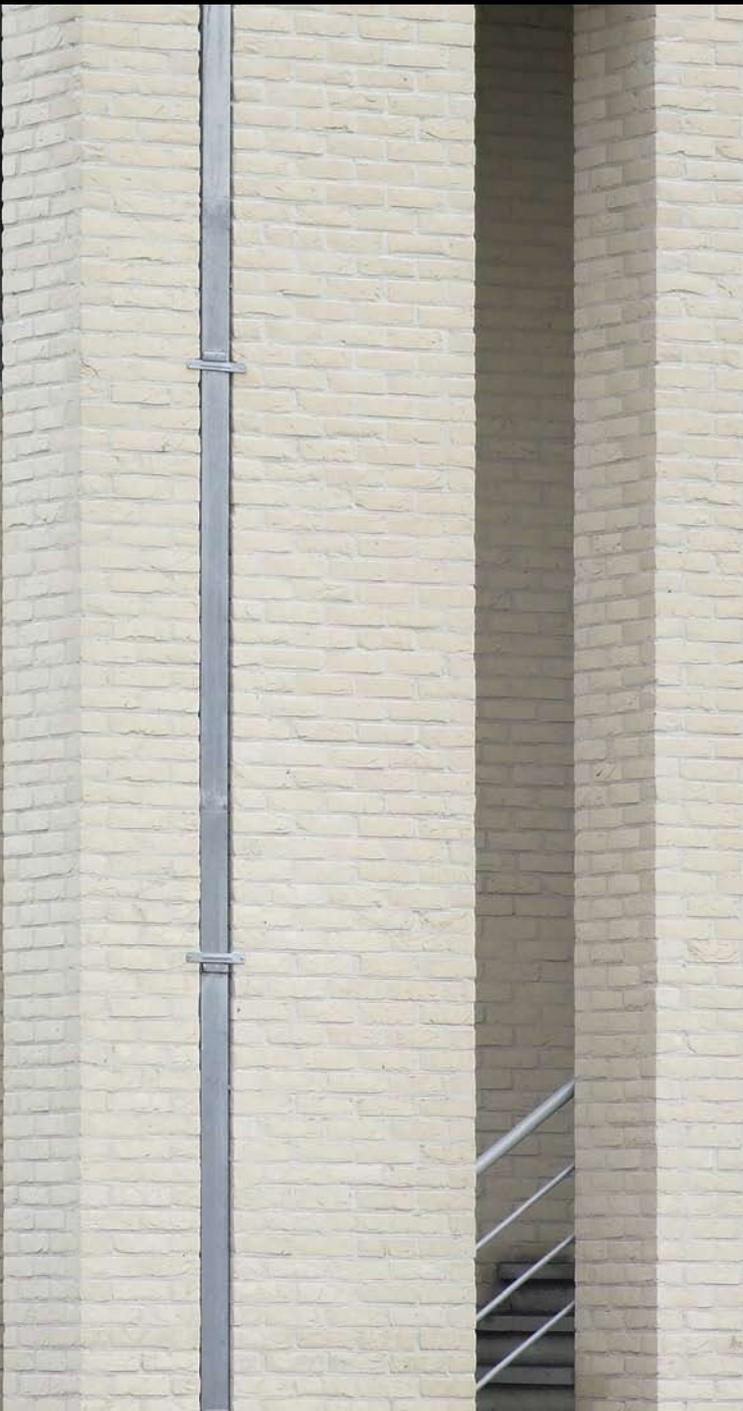

Bianco

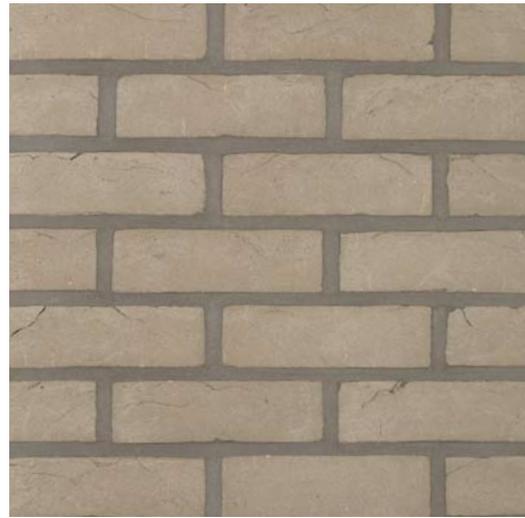

Atlasgrijs



Gobi



Nero Zwart Mangaan

Rainbow



Paepsteen



Pampas



Plaza





Paepsteen

Heritage



Oud Bokrijk



Oud Bokrijk*



Oud Diest*



Oud Wezent*



Oud Bologne*



Oud Brussel*



Oud Kortemark*



Oud Watou*



Oude Paep*

* Only in random bond

Technical specifications

Article	Format	Weight/piece	Pieces/m ² (with joint of 12mm)	Average compressive strength	Water absorption	Initial water absorption	Dimensions / Tolerance	Durability – Frost resistance / Active soluble salt content
Classics								
Alyssum	WF(210 x 100 x 50)	± 1,81 kg	± 72	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,18 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Veldbloem	WDF(215x100x65)	± 2,18 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Barok "83"	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Duinbergen	WDF(215x100x65)	± 2,18 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Hocht	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Maldon Antique	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Neo Romaans	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Oud Romaans	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Rood	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Welham Antique	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Cie Classic	WDF(215x100x65)	± 2,27kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2

Disclaimer The brick colours shown in this brochure are only as accurate as the printing process will allow. Customers are advised to obtain samples. Technical data are approximate.

Article	Format	Weight/piece	Pieces/m ² (with joint of 12mm)	Average compressive strength	Water absorption	Initial water absorption	Dimensions / Tolerance	Durability – Frost resistance / Active soluble salt content
Rainbow								
Amarillo	WF(210 x 100 x 50)	± 1,81 kg	± 72	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,18 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Atlasgrijs	WF(205 x 100 x 50)	± 1,96 kg	± 74	≥ 25 N/mm ²	≤ 10%	± 1,5kg/(m ² min)	T1/R1	F2/S2
	WDF(210x100x65)	± 2,38 kg	± 59	≥ 25 N/mm ²	≤ 10%	± 1,5kg/(m ² min)	T1/R1	F2/S2
Bianco	WF(205 x 100 x 50)	± 1,96 kg	± 74	≥ 25 N/mm ²	≤ 10%	± 1,5kg/(m ² min)	T1/R1	F2/S2
	WDF(210x100x65)	± 2,38 kg	± 59	≥ 25 N/mm ²	≤ 10%	± 1,5kg/(m ² min)	T1/R1	F2/S2
Gobi	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Lavagrijs	WF(205 x 100 x 50)	± 1,96 kg	± 74	≥ 25 N/mm ²	≤ 10%	± 1,5kg/(m ² min)	T1/R1	F2/S2
	WDF(210x100x65)	± 2,38 kg	± 59	≥ 25 N/mm ²	≤ 10%	± 1,5kg/(m ² min)	T1/R1	F2/S2
Nero Zwart Mangaan	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Paepsteen	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Pampas	WF(210 x 100 x 50)	± 1,88 kg	± 72	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,27 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Plaza	WF(210 x 100 x 50)	± 1,81 kg	± 72	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
	WDF(215x100x65)	± 2,18 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2

Heritage								
Oud Bokrijk	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Oud Bologne	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Oud Brussel	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Oud Diest	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Oud Kortemark	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Oud Watou	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 17%	± 2,5kg/(m ² min)	T1/R1	F2/S2
Oud Wezent	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2
Oude Paep	WDF(215x100x65)	± 2,28 kg	± 58	≥ 25 N/mm ²	≤ 14%	± 4,5kg/(m ² min)	T1/R1	F2/S2



**HEYLEN
BRICKS**

Wienerberger Export Division

Kapel ter Bede 121

B-8500 Kortrijk

T +32 56 24 95 83

F +32 56 26 43 32

export.be@wienerberger.com

www.wienerberger.com